

PALLET RACKING

**Goods in stock available immediately
and on the lorry in only 7 days!**

PERFORMANCE CHARACTERISTICS

- Statistically optimised and stable profiles.
- Sendzimir-galvanised frame constructions
- Shelf loads (per level) of up to 4250 kg.
- Adjustability of the pallet beams in the grid of 50 mm.
- Properly dimensioned accessories like for example Skirting and wall protection.
- The surface technology with a cathodic dip coating system (KTL), coats all painted components. Following a comprehensive pre- and post-treatment (degreasing, cleaning, activating, zinc phosphating, dip coating and burning in), the racks are protected against corrosion with a light-grey (i.e. RAL 7035) coating.
- Competent advice through our sales offices.



Rack frame sendzimir-galvanized,
Standard colour crossbar light-grey RAL 7035



System



Edge protection



Base

Elvedi GmbH

Aitlingerstrasse 18
D-78176 Blumberg


Ph: +49 (0) 7702 4382 0

Fax: +49 (0) 7702 4382 10

info@elvedi.com



Standard shelf unit

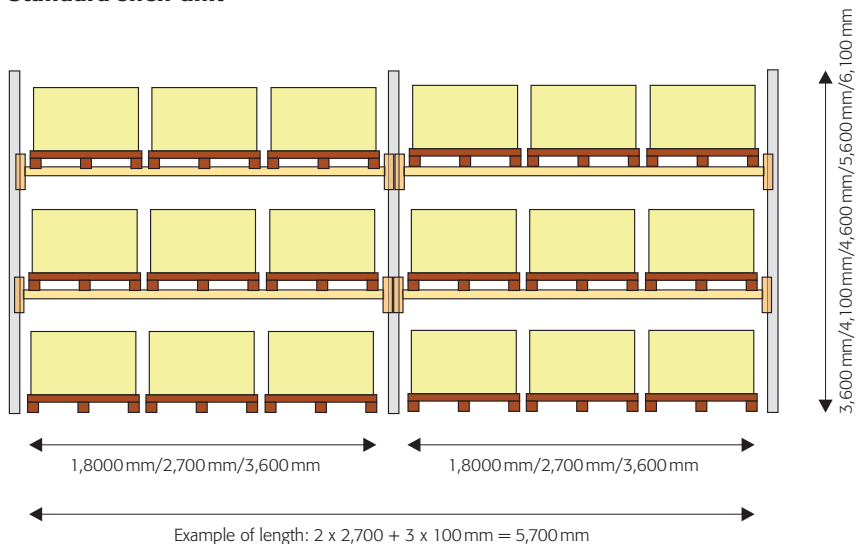

RACK

Rack unscrewed, incl. base.
Frame load-bearing capacity of 8800 to 17220 kg.

Depth


1100 mm

Height	Frame load-bearing capacity*	Type
3600 mm	12300 kg	20 M
4100 mm	12 300 kg	20 M
4600 mm	15 000 kg	21 M
5600 mm	15 000 kg	21 M
6100 mm	15 000 kg	21 M
6100 mm	17 200 kg	25 M

* Frame load-bearing capacity for 1st crossbar from floor max. up to 1200 mm (O.K.), valid from 3 shelves (1 x standard shelf unit + 1 x extension shelf unit).

Extension shelf unit

Rack frame sendzimir-coated,
Standard colour crossbar light-grey RAL 7035

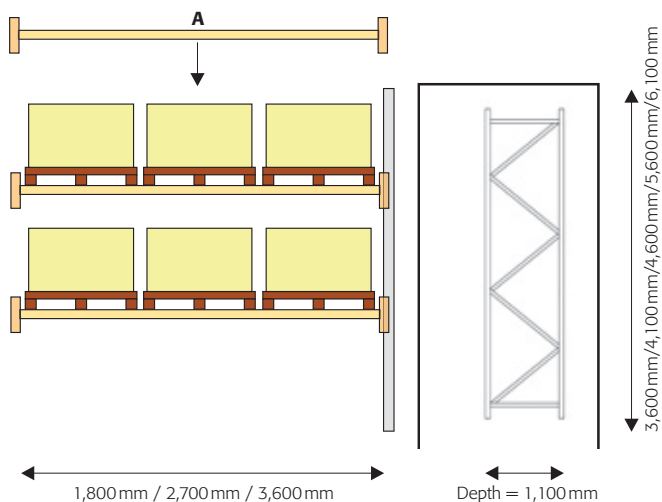

TRAVERSES / BEAMS

Length	Load per shelf	Type
1800 mm	4500 kg	120 B
2700 mm	4500 kg	120 B
2700 mm	3600 kg	120 C
3600 mm	4250 kg	150 E

Rack frame sendzimir-coated,
Standard colour crossbar light-grey RAL 7035

